



SKID STEER LOADER S450 CEV-V



Proven combination of power and maneuverability to push through
toughest jobs

- All-round visibility
- Superior lift arms
- Quick serviceability
- Best-in-class Safety
- Robust engine
- Exceptional comfort

One Tough Animal

S450 — SPECIFICATIONS

Performance

Rated Operating Capacity	654 kg
Tipping Load	1308 kg
Operating Weight	2436 kg
Travel Speed	Single speed - 12.3 km/h (max.) Two-speed - 14.8 km/h (max.)

Engine

Model	Bobcat Engine Stage V
Fuel	Diesel
Cooling	Liquid
Horsepower @ 2600 rpm	49 hp
Torque @ 1800 rpm	182 Nm
Displacement	2393 cm3
Air Induction	Turbocharged & Intercooled

Weights

Fuel Tank	53.8 L
-----------	--------

Controls

Machine Steering	"Direction and speed controlled by two hand operated steering levers or optional joystick(s)"
------------------	---

Standard Features

Automatically activated glow plugs	Instrumentation
Auxiliary hydraulics:	Lift arm support
Bab-Tach frame	Operating lights, front and rear
Bobcat Interlock Control System (BICS)	Parking brake
10 x 16.5 10 ply, Severe duty tire	Seat belt
Electrically activated proportional front auxiliary hydraulics	Seat bar
Engine / hydraulics system shutdown	Spark arrestor muffler
ROPS/FOPS Cabin	ARAI Certification
Backup Alarm	

Roll Over Protective Structure (ROPS) meets requirements of SAE J1040 and ISO 3471; Falling Object Protective Structure (FOPS) meet requirements of SAE J1043 and ISO 3449, level 1

Options

Cab enclosure
Cab enclosure with HVAC
Solid tyres
Suspension Seat



Compactable Attachments

Angle Broom	Landscape Rake
Auger	Laser Equipment
Backhoe	Grade Lasers
Bale Fork	Mower
Breaker	Pallet Forks, Hydraulic
Brush Saw	Pallet Forks
Brushcat™ Rotary Cutter	Planer
Bucket, Dirt	Pressure Washer
Bucket (CI)	Salt & Sand Spreader
Bucket (GP)	Scarifier
Bucket (LP)	Scraper
Bucket - Combination	Seeder
Bucket - Fertiliser and Grain	Snow Blade
Bucket - Skeleton	Snow Blower
Bucket - Snow & Light Material	Snow Pusher
Concrete Mixer	Snow V-Blade
Concrete Pump	Sod Layer
Digger	Soil Conditioner
Dozer Blade	Soil and Asphalt Spreader
Dumping Hopper	Sweeper
Flail Cutter	Tiller
Grader	Tilt-Tatch™
Grapple, Farm — Utility on Fork	Trencher
Grapple, Industrial	Utility Fork
Landplane	Vibratory Roller
	Wood Chipper

Dimensions:

(dimensions in mm)

A	3559.0 mm
B	1976.0 mm
C	23°
D	213.0 mm
E	899.0 mm
F	2499 mm
G	3173.0 mm
H	28°
I	2157.0 mm
J	2781.0 mm
K	528 mm
L	40°
M	91°
N	1575.0 mm
O	1941 mm
P	1222 mm
Q	1488 mm

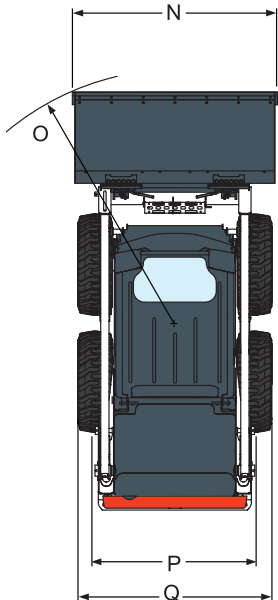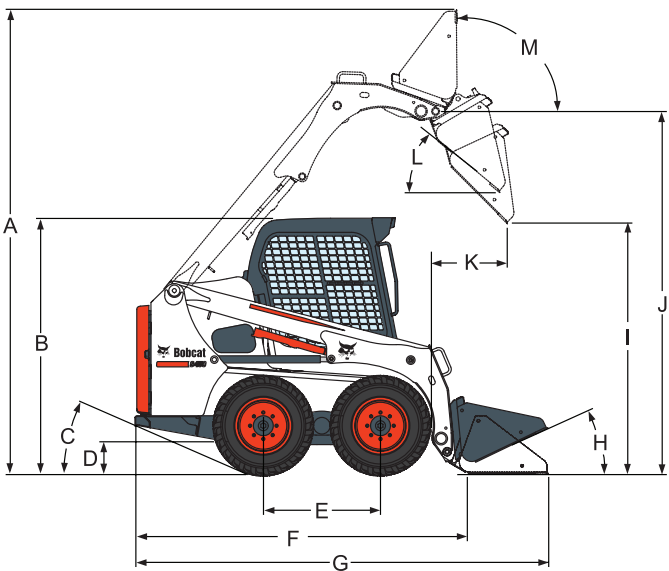

Scan to enquire



Toll Free No.  1800 1032 869



Bobcat

Doosan Bobcat India

HTC Towers, 6TH Floor, No. 41, GST Road,
Guindy, Chennai - 600 032.

+91 96000 04852  bobcatindia@doosan.com

 www.bobcat.com